# Apphatec<sup>®</sup>

## 4000 Ultrasonically Welded & Taped - Model

Innovative multi-layer chemical barrier technology, Type 3/4/5 protection

Previously known as: MICROCHEM<sup>®</sup> 4000 - Model 111

### Heavy-duty multi-layer protective suit, guarding against over 200 chemical hazards.

- Specialized protection: The AlphaTec<sup>®</sup> 4000 Ultrasonically Welded & Taped - Model 111 is a heavy-duty chemical-protective suit, permeationtested to withstand over 200 chemical hazards\*, among which chemical warfare agents
- Enhanced defenses: This full-body protective suit also boasts double cuffs and dual-zip systems, further enhancing its defensive barrier
- Increased strength: Thanks to its taped and welded seams, this protective suit offers users a strong, dependable barrier against a variety of hazards
- **Optimized comfort:** Knitted inner cuffs and inner textile-type fabric facilitates wearer acceptance
- Improved fit: Its elasticated two-piece hood, waist, cuffs and ankles simplify the donning and removal process, for personal protection that is easy to wear
- Certified antistatic capabilities: This protective suit also meets EN 1149-5 and AATCC 76 antistatic standards

\*CE Category III Type 3/4/5 protection





#### Industries

- Chemical
- Life Sciences
- Mining
- Fire and Rescue
- Oil and gasAutomotive Aftermarket
- Emergency Medical Services
- Food Processing

#### **KEY FEATURES & BENEFITS**

- Intensive permeation testing: Protection from varied chemicals\*
- Double cuffs and dual-zip systems: Extended wear life
- Taped and welded seams: Additional barrier defenses


\*including chemical warfare agents

#### Applications


- Contaminated
  Environments
- Chemical Handling
- Filling, blending and charging of raw materials
- Transferring liquids and solids
- Opening and draining pumps valves or lines
- Loading and unloading of proces equipment
- Raw material sample collection
- Concentration mixing and palletisation
- Hazmat response
- Assembly and disassembly of equipment

#### Technology



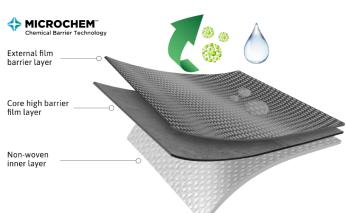

#### Seam Diagram

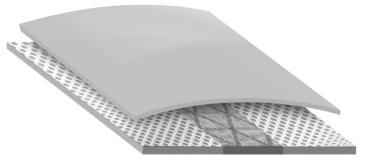



#### WWW.ANSELL.COM

#### Material Diagram

#### **Performance Standards**



#### **Product Information**

| Product Information |  |
|---------------------|--|
| Available Sizes     | S, M, L, XL, 2XL   |
| Color               | Green  |
| Country Of Origin   | China  |
| Models Available    | 103, 121, 122, 125, 132, 162   |
| Packaging Overview  | Individually packaged  |
| Product Material    | Multi-layer non-woven barrier Laminate fabric                                  |
| Product Reference   | 4000 Ultrasonically Welded & Taped - Model 111                                 |
| Standards Overview  | CE CATEGORY III (Type 3-B, Type 4-B, Type 5-B, EN 1073-2, EN 14126, EN 1149-5) |
| Seam Type           | Welded and Taped   |
| Shelf Life          | 5 years  |
| Style Number        | G40T111  |

#### Suit components & accessories

| Suit Components and Accessories |   |
|---------------------------------|---|
| Design Features                 | Coverall, 2-piece hood, double zip closure, double cuffs with knitted inner cuff. Elasticated hood, waist, wrists and ankles. |

#### For additional in formation visit us at www.ansell.com, or call us at

**Europe, Middle East & Africa Region** Ansell Healthcare Europe NV T: +32 (0) 2 528 74 00

Asia Pacific Region Ansell Global Trading Center T: +603 8310 6688 North America Region Ansell Healthcare Products LLC T: +1 800 800 0444 Latin America & Caribbean Region

Ansell Commercial Mexico S.A. de C.V. T: +52 442 248 1544 / 248 3133 **Australia** Ansell Limited T: +61 1800 337 041

Ansell, <sup>®</sup> and <sup>™</sup> are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending: www.ansell.com/patentmarking © 2024 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.

