

6500 - Model 819

Multi-layer chemical barrier technology for Type 1 / Limited Use Level A Gastight protection - Boot, Passthrough & CEJN Connector

Gastight multi-layer protective suit, offering wearers superb chemical resistance.

- **Advanced protection:** The AlphaTec® 6500 Stitched & Taped - Model 819 boasts innovative, lightweight twin-layer material, with an inner barrier glove and outer butyl rubber glove, for excellent levels of chemical resistance
- **Improved visibility:** Bright yellow in color, this protective suit remains highly visible, ensuring greater worker and workplace safety
- **Increased comfort and ergonomics:** Its SCBA hump encourage more ergonomic movements, granting wearers better comfort
- **Enhanced features:** This full-body protection suit also includes an integrated boot, passthrough and CEJN connector



Industries

- Chemical
- Life Sciences
- Mining
- Fire and Rescue
- Oil and gas

Applications


- Contaminated Environments
- Chemical Handling
- Raw material sample collection
- Hazmat response
- Emergency Response
- Military

KEY FEATURES & BENEFITS


- **Lightweight twin-layer barrier:** Superb chemical resistance*
- **Yellow color:** Greater visibility, for assured workplace safety
- **Enhanced features:** Large SCBA hump, integrated boot, passthrough and CEJN connector
- **Protection against Chemical warfare agents:** Breakthrough time > 48 Hours for Seven warfare agents

**Type 1/Level A protection

Material Diagram

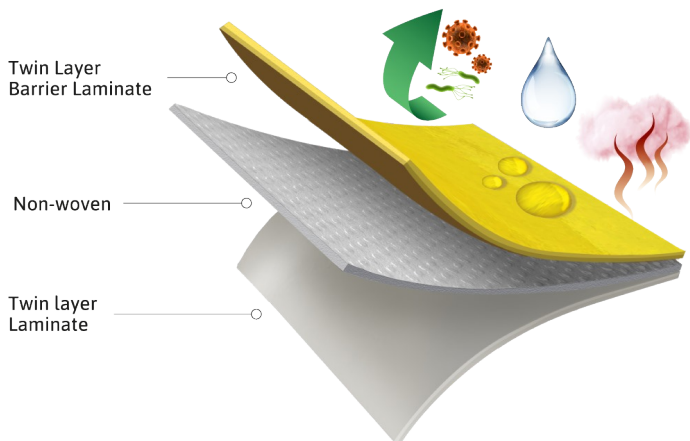

Seam Diagram

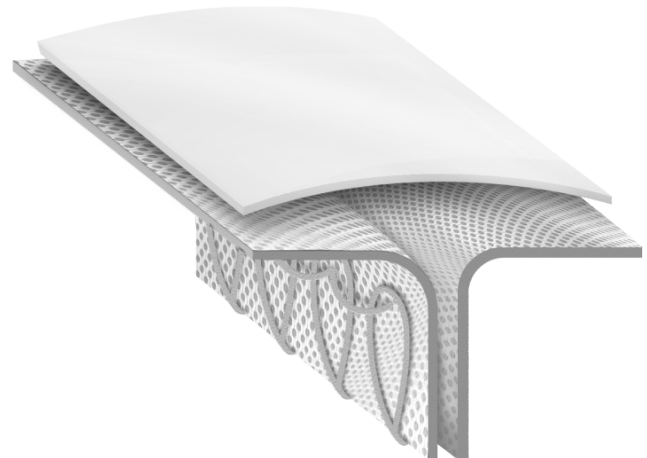

Performance Standards



0598



TYPE 1a-B



TYPE 1a-B



EN 14126

Product Information

| Product Information | |
|---------------------|---|
| Available Sizes | S, M, L, XL, 2XL |
| Color | Yellow |
| Models Available | 803, 809, 819 |
| Packaging Overview | Individually packaged |
| Product Material | Twin multi layer barrier films laminated either side of non-woven fabric |
| Product Reference | 6500 - Model 819 |
| Standards Overview | <ul style="list-style-type: none">• EN 943-1• EN 14126 (infective agents)• Tested and compliant to EN 943-2 with the exception of the low temperature practical performance requirement |
| Seam Type | Stitched and Taped |
| Shelf Life | 10 Years |
| Style Number | Y65A819M |

Suit components & accessories

| Suit Components and Accessories | |
|---------------------------------|---|
| Design Features | Fully encapsulating Type 1 Limited Use Gastight Suit with attached boots, complete with straight outer leg. Side entry DYNAT G2 CR/PA gastight zipper, protected by a splash guard/flap. Other suit features include large SCBA hump, single sleeve, external locking cuff and GA2 glove set (AlphaTec® 02-100 barrier inner + AlphaTec® 38-560 butyl outer). Large hump for internal wearing of self-contained breathing apparatus. Passthrough device with CEJN 342 connector and plug. Rear positioned exhaust valves. |
| Visor And Face Seal | Large field of view GAG visor |
| Gloves And Attachments | AlphaTec® 02-100 & AlphaTec® 38-560 |
| Footwear And Attachments | Nitrile Rubber boots |
| Zipper | DYNAT G2 CR/PA gastight zipper |

For additional information visit us at www.ansell.com, or call us at

Europe, Middle East & Africa Region

Ansell Healthcare Europe NV
T: +32 (0) 2 528 74 00

North America Region

Ansell Healthcare Products LLC
T: +1 800 800 0444

Australia

Ansell Limited
T: +61 1800 337 041

Asia Pacific Region

Ansell Global Trading Center
T: +603 8310 6688

Latin America & Caribbean Region

Ansell Commercial Mexico S.A. de C.V.
T: +52 442 248 1544 / 248 3133

Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending; www.ansell.com/patentmarking © 2024 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.

