

# 66-674 Detachable Hood

Chemical-splash, flash fire, arc flash and hot liquid resistant hood for use with AlphaTec Breathable jacket, coat and coverall.

# Liquid chemical splash resistant hood providing, flash fire, hot liquids and arc resistance..

AlphaTec<sup>®</sup> 6667x series coat is made of Nomex<sup>®</sup> based fabric containing a breathable membrane. It offers flash fire protection as well as exceptional liquid chemical splash protection, while also helping to manage heat stress by allowing body heat to disperse through the fabric. The worker is protected and comfortable throughout a full shift.

- Optional hood for attachment to the collar by means of hook and loop fastenings
- Designed to accommodate a hard hat
- Chin Strap
- Intended for use with 66670 jacket, 66671 coat or 66677 coverall





#### **Industries**

- Chemical
- Food Processing
- Mining
- Maintenance
- Metal fabrication

#### **Applications**


- Plant disinfection and sanitization
- Chemical Handling
- Repair and maintenance
- Oil Platforms
- MiningMetal Plating
- Food Processing
- Sanitation
- Utilities
- Energy

- Water plants
- Transport if hazardous substances
- Pulp and Paper Production

### **KEY FEATURES & BENEFITS**

- Optional hood attaches to the collar by means of hook and loop fastenings and features a chin strap
- Chemical splash fabric provides protection with penetration data for more than 70 chemicals
- FR fabric resists flash fire, arc flash and hot liquids
- Breathable fabric maximizes comfort, reducing the risk of heat stress and increasing productivity
- Durable laminated fabric system is machine washable for longer, cost-effective service life

#### **Seam Diagram**

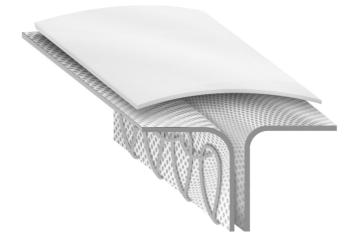

Page 2 of 4

# **Performance Standards**





#### **Product Information**

<b>Product Information</b>	
Available Sizes	One Size
Color	Blue
Country Of Origin	Canada
Packaging Overview	Individually Packed
Product Material	White Nomex <sup>®</sup> inner with breathable membrane and Blue Nomex <sup>®</sup> outer
Product Reference	66-674 Detachable Hood
Standards Overview	<ul> <li>Tested to ASTM F955-2015 - Standard Test Method for Evaluating Heat Transfer through Materials for Protective Clothing Upon Contact with Molten Substances</li> <li>ASTM F1671 - Resistance to bloodborne pathogens</li> <li>EN 1149-5 - Electrostatic properties</li> </ul>
Seam Type	Stitched and Taped
Shelf Life	5 years



## For additional in formation visit us at www.ansell.com, or call us at

Europe, Middle East & Africa Region Ansell Healthcare Europe NV T: +32 (0) 2 528 74 00

Asia Pacific Region Ansell Global Trading Center T: +603 8310 6688 North America Region Ansell Healthcare Products LLC T: +1 800 800 0444

Latin America & Caribbean Region Ansell Commercial Mexico S.A. de C.V. T: +52 442 248 1544 / 248 3133

Australia Ansell Limited T: +61 1800 337 041

Ansell,  $^{\textcircled{8}}$  and  $^{\textcircled{m}}$  are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending: www.ansell.com/patentmarking  $^{\textcircled{e}}$  2025 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.

