


Blue nitrile gloves with raised texture surface, offering confident wet, dry and oily grip

- **Strong grip:** Thanks to a Mega Texture surface, MICROFLEX[®] 93-283 disposable gloves boast secure grip, for handling wet, oily, or fatty objects
- **Tear-resistant:** These nitrile gloves' 0.2mm/8 mil thickness increases their resistance to tears
- **Food handling compliance:** Certified as food handling gloves, these gloves are ideal for a wide range of food handling applications
- **Ideal for double donning:** Their generous fit allows them to be worn comfortably over thermal or cut-resistant gloves
- **Expanded protection:** Added forearm and wrist protection is provided by an extended cuff design
- **Specialized protection:** With EN 374 Type B chemical resistance certification, MICROFLEX[®] Mega Texture 93-283 gloves ensure light chemical splash protection

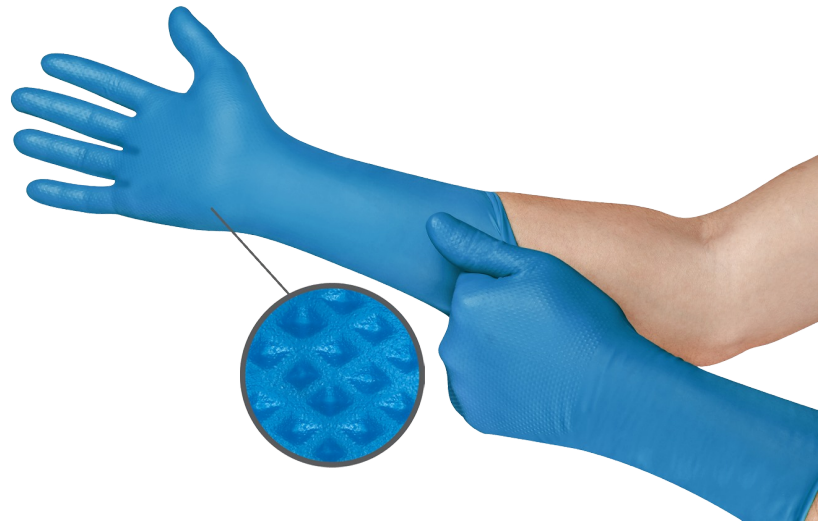

Industries

- Food Processing
- Janitorial / Sanitation
- Automotive Aftermarket
- Machinery and Equipment
- Chemical

Recommended For

- Packaging and labeling
- Handling of frozen foods
- Janitorial, clean up and maintenance
- Chemical Handling
- Chemical Splash
- Enhanced grip in wet environments
- General Purpose Auto Aftermarket
- Handling of machined parts coated with light oil
- Maintenance of plant and machines
- Production line support and maintenance
- Use as an underglove when double gloving
- Vehicle maintenance

TECHNICAL DATA SHEET

Product Information	
External Glove Surface	Raised Diamond Grip Pattern
Audit Standards	ISO 13485, ISO 9001
Product Certification	Medical Device Regulation (EU) 2017/745 Class I, Personal Protective Equipment Regulation (EU) 2016/425 Category III risks, ASTM D6319, CE 0493, EC 2023/2006, EU Food Contact Approved, EN ISO 21420:2020, EN ISO 374-1:2016 Type B JKPT, EN ISO 374-5:2016 Virus, ISO 9001, ISO 13485, ISO 18889:2019, UKCA
Packaging Overview	50 gloves per dispenser; 10 dispensers per case; 500 gloves per case; 2XL and 3XL: 44 gloves per dispenser; 440 gloves per case
Storage Instructions	Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition.
Country Of Origin	Thailand
Product Segmentation	High Risk
Antistatic	Yes EN1149
Silicone Free	No
Vulcanization Chemical Accelerators	<ul style="list-style-type: none"> Zinc Dibutyldithiocarbamate (ZDBC) <p><i>Only a very small number of users may be sensitive to this ingredient(s) and hence may develop irritant and/or allergic contact reactions.</i></p>

PHYSICAL PROPERTIES

	Typical Values		Testing Method
Length (mm/inches)	300 / 11.8		ASTM D3767, EN 420
Freedom from Holes (Inspection level I)	1.5 AQL		ASTM D5151, EN 374-2
Palm Thickness (mm/mils)	0.20 / 7.9		ASTM D3767, EN 420
Finger Thickness (mm/mils)	0.24 / 9.4		ASTM D3767, EN 420
	BEFORE AGING	AFTER AGING	
Ultimate Tensile Strength (MPa)	25	23	ASTM D412 & D573
Elongation at Break (%)	500	400	ASTM D412
Force at break (N)	>6	>6	EN 455-2

ORDERING INFORMATION

Size	S (6.5 - 7)	M (7.5 - 8)	L (8.5 - 9)	XL (9.5 - 10)	XXL (10.5 - 11)	XXXL (11.5 - 12)
Product Code	93283070	93283080	93283090	93283100	93283110	93283120

Performance Standards and Regulatory Compliance



For additional information visit us at www.ansell.com, or call us at

Europe, Middle East & Africa Region

Ansell Healthcare Europe NV
T: +32 (0) 2 528 74 00
F: +32 (0) 2 528 74 01

Asia Pacific Region

MY +603 8310 6688
apac.medical@ansell.com
CN: +86 21 38275000
infochina@ansell.com
JP: +813 5549 8151
info.medical.jp@ansell.com

North America Region

Ansell Healthcare Products LLC
T: +1 800 800 0444
F: +1 800 800 0445

Latin America & Caribbean Region

BR +55 (11) 3356-3100
latam.medical@ansell.com
MX: +52 442 296 2050
latam.medical@ansell.com
CO: +57 1 288 3247
latam.medical@ansell.com

Australia

Ansell Limited
T: +61 1800 337 041
F: +61 1800 803 578

Russia

Ansell PYC
Ten. +7 495 258 13 16

Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending; www.ansell.com/patentmarking © 2025 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.

