

5000 - Model 151-G02 Rear entry chemical protective coverall with rubber face seal, Type 3/4/5 protection

Previously known as: MICROCHEM[®] 5000 - Model 151-G02

Developed as a lightweight, Type 3 chemical protection solution for first responders and the emergency services..

- Specialized protection: The AlphaTec[®] 5000 Ultrasonically Welded & Taped - Model 151-G02 is a multi-layer rear-entry protective suit, resistant to chemicals, biological hazards and chemical warfare agents
- Improved visibility: Due to its bright orange in color, this chemical protective suit is highly noticeable, which enhances workplace safety, and is also usable as a HAZMAT suit
- Heightened defenses: Protection against liquid and particulate hazards is further enhanced by this protective suit's welded and taped seams
- Enhanced features: It features a neoprene rubber face seal that fits most full-face respirators, attached socks with boot overflaps, rear horizontal zip entry, as well as attached Ansell barrier gloves with oversleeves and finger loops
- Certified antistatic capabilities: This full body protection suit also satisfies EN 1149-5 antistatic standards

*CE Category III Type 3/4/5 protection





Industries

- Chemical
- Life Sciences
- Mining
- Fire and Rescue
- Oil and gasAutomotive Aftermarket
- Emergency Medical Services
- Food Processing

KEY FEATURES & BENEFITS

- **Permeation barrier:** Resists harmful chemicals* and biohazards
- **Highly visible orange color:** For reduced workplace injuries
- **Taped and welded seams:** Robust particulate and liquid resistance


*>480-minute breakthrough time against 14 of the 15 chemicals listed in EN ISO 6529

Applications


- Contaminated Environments
- Chemical Handling
- Filling, blending and charging of raw materials
- Transferring liquids and solids
- Opening and draining pumps valves or lines
- Loading and unloading of proces equipment
- Raw material sample collection
- Concentration mixing and palletisation
- Hazmat response
- Assembly and disassembly of large pipes

Technology



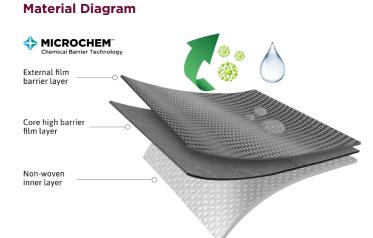

Seam Diagram

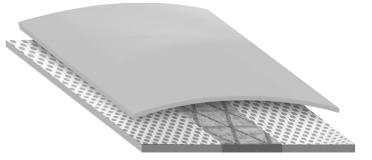



Performance Standards



Product Information

Product Information	
Available Sizes	S, M, L, XL, 2XL, 3XL, 4XL, 5XL
Color	Orange
Country Of Origin	China
Packaging Overview	Individually Packed
Product Material	Multi-layer non-woven barrier Laminate fabric
Product Reference	5000 - Model 151-G02
Standards Overview	CE CATEGORY III (Type 3-B, Type 4-B, Type 5-B, EN 1073-2, EN 14126, EN 1149-5)
Seam Type	Welded and Taped
Shelf Life	5 years
Style Number	O50T151B



Suit components & accessories

Suit Components and Accessories	
Design Features	Neoprene rubber face seal, rear horizontal zip entry, ultrasonically welded and taped seams. Attached socks with boot overflap and attached Ansell AlphaTec [®] 02-100 Gloves with oversleeves and finger loops.
Gloves And Attachments	AlphaTec [®] 02-100

For additional in formation visit us at www.ansell.com, or call us at

Europe, Middle East & Africa Region Ansell Healthcare Europe NV T: +32 (0) 2 528 74 00

Asia Pacific Region Ansell Global Trading Center T: +603 8310 6688 North America Region Ansell Healthcare Products LLC T: +1 800 800 0444 Latin America & Caribbean Region

Ansell Commercial Mexico S.A. de C.V. T: +52 442 248 1544 / 248 3133 **Australia** Ansell Limited T: +61 1800 337 041

Ansell, [®] and [™] are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending: www.ansell.com/patentmarking © 2025 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.

