

### Ventilated suit designed for use in combination with belt- mounted, continuous flow airline respirator systems..

#### DESIGN

AVANT STS Regulator - Continuous Flow Airline  
Regulator /Pass-Thru Device (SOLD SEPARATELY)

#### FEATURES

- Affixed by the wearer and detachable for reuse when appropriate
- Air flow adjustable from 340 L/min to 590 L/min at a working pressure of 3.5 to 5 bar
- Polyester webbing belt with YKK buckle for an assured connection should the airline be snagged or pulled
- Low flow warning whistle
- External connector mount swivels 360°
- A range of external airline connector options are available (contact Ansell Microgard Ltd or your distributor for details)



## Industries

- Chemical
- Life Sciences
- Mining
- Fire and Rescue
- Oil and gas


## Applications

- Contaminated Environments
- Chemical Handling
- Filling, blending and charging of raw materials
- Transferring liquids and solids
- Opening and draining pumps valves or lines
- Loading and unloading of proces equipment
- Raw material sample collection
- Concentration mixing and palletisation
- Hazmat response
- Assembly and disassembly of large pipes

## KEY FEATURES & BENEFITS

- Exceptional protection, over 200 chemicals permeation tested, including chemical warfare agents
- Welded and taped seams, our highest barrier to liquids and particulates
- Panoramic visor design ensures a good field of vision for the wearer
- A range of sleeve options available, including double cuffs and permanently attached chemical protective gloves.
- HEPA filter provides secondary protection from airline contamination and a SMC silencer ensures the noise inside the suit is always below 70 dB (even at maximum airflow).
- Suit/Belt mounted regulator complete with a low flow warning whistle the AVANT STS regulator can be mounted on the suit and removed for reuse providing cleaning and decontamination is permissible.
- Emergency rip cord permits rapid doffing of the suit in cases of emergency or undue distress to the wearer
- Attached socks with elasticated boot overflap - Socks are designed to be worn inside chemical protective boots with the leg overflap worn outside to reduce the potential for chemical ingress.

## Seam Diagram

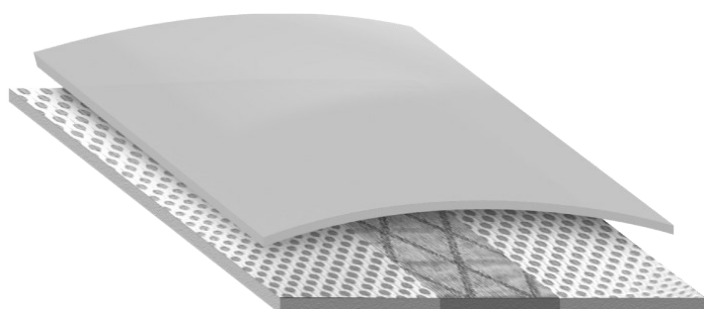

## Performance Standards



## Product Information

Product Information	
Available Sizes	S, M, L, XL, 2XL, 3XL
Color	Green
Product Reference	4000 AVANT AIRline - Model 755-G05
Standards Overview	CE CATEGORY III (Type 3, EN 1073-1, EN 14594, EN 1149-5)
Seam Type	Welded and Taped
Style Number	G40T755D

## Suit components & accessories

### Suit Components and Accessories

#### Design Features

Fully encapsulated suit designed for use in combination with the MICROCHEM® AVANT STS V.1 airline regulator. Suit features include internal air-channel ventilation system double cuffs, finger & thumb loop, G01 Ansell Solvex (Nitrile) gloves, G02 Ansell Barrier gloves or G03 KCL Camapren (Neoprene) gloves. Attached socks with elasticated boot over-flap and emergency rip cord.

**For additional information visit us at [www.ansell.com](http://www.ansell.com), or call us at**

#### Europe, Middle East & Africa Region

Ansell Healthcare Europe NV  
T: +32 (0) 2 528 74 00

#### North America Region

Ansell Healthcare Products LLC  
T: +1 800 800 0444

#### Australia

Ansell Limited  
T: +61 1800 337 041

#### Asia Pacific Region

Ansell Global Trading Center  
T: +603 8310 6688

#### Latin America & Caribbean Region

Ansell Commercial Mexico S.A. de C.V.  
T: +52 442 248 1544 / 248 3133

Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending; [www.ansell.com/patentmarking](http://www.ansell.com/patentmarking) © 2025 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.

