

Ultra-low-linting breathable protective suit, made with microporous laminate for chemical protection.

- **Specialized protection:** The AlphaTec™ 2000 Ts PLUS Stitched & Taped - Model 134's protective barrier* resists liquid and particulate biological hazards and low-concentration liquid chemicals**
- **Heightened breathability:** Thanks to air- and water vapor-permeable microporous laminate fabric, this chemical-protective suit is more breathable, lowering the risk of heat stress
- **Enhanced fit and features:** Comfort is enhanced by its optimized fit, while internal overtaped stitching and serged and taped seams strengthen its protective barrier, for even greater personal protection
- **Reduced contamination risks:** This protective suit's ultra-low-linting fabric and tunneled, elasticated wrists and ankles reduce the risk of cross contamination in critical areas
- **Decreased surface defect risks:** Its silicone-free construction makes it suitable for spray-painting applications
- **Assured antistatic properties:** It also complies with EN 1149-5 antistatic standards

*this chemical protection suit ensures CE Category III Type 4/5/6 protection

**it withstands liquid chemical saturation and filters 100% of particulates down to 0.01 microns in size (EMSL test method)

Industries

- Life Sciences
- Automotive
- Food Processing


Applications

- Product inspection
- Loading and hauling
- Maintaining lab furniture and equipment
- Fibre Glass/Resin Applications/Ceramic Fibres
- Body painting including surface inspection
- Cleaning of plant and machines


KEY FEATURES & BENEFITS

- **Chemical barrier:** Low-risk liquid chemicals, liquid and particulate biohazards
- **Microporous laminate:** Greater breathability, lesser risk of heat stress
- **Optimized fit:** Enhanced wearer comfort and improved workplace safety

Material Diagram

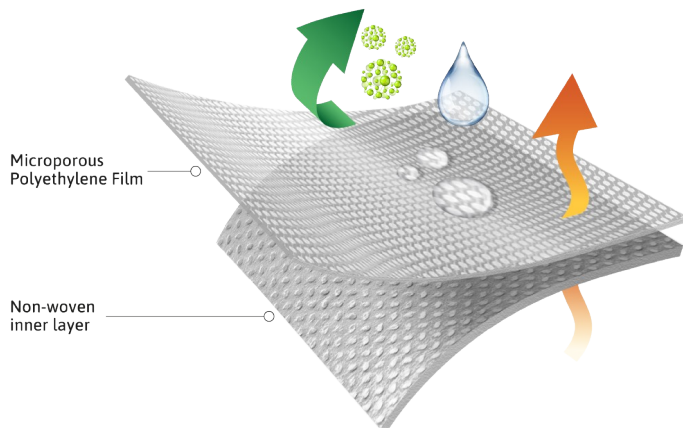

Seam Diagram

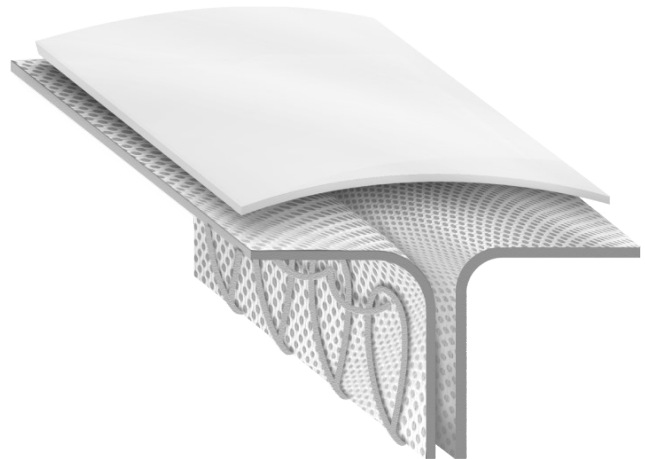

Performance Standards



Product Information

Product Information	
Available Sizes	XS, S, M, L, XL, 2XL, 3XL, 4XL, 5XL
Color	White
Packaging Overview	Individually Packed
Product Material	Microporous polyethylene Laminate non-woven
Product Reference	2000 Ts PLUS - Model 134
Standards Overview	CE CATEGORY III (Type 4-B, Type 5-B, Type 6-B, EN 1073-2, EN 14126, DIN 32781, EN 1149-5)
Seam Type	Stitched and Taped
Shelf Life	5 years

Suit components & accessories

Suit Components and Accessories

Design Features

Coverall, 3-piece hood, single zipper with re-sealable storm flap, and chin strap. Elasticated waist, elasticated wrists, hood and ankles.

For additional information visit us at www.ansell.com, or call us at

Europe, Middle East & Africa Region

Ansell Healthcare Europe NV
T: +32 (0) 2 528 74 00

North America Region

Ansell Healthcare Products LLC
T: +1 800 800 0444

Australia

Ansell Limited
T: +61 1800 337 041

Asia Pacific Region

Ansell Global Trading Center
T: +603 8310 6688

Latin America & Caribbean Region

Ansell Commercial Mexico S.A. de C.V.
T: +52 442 248 1544 / 248 3133

Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending; www.ansell.com/patentmarking © 2025 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.

