

Previously known as: TRELLCHEM® Splash 900

Reusable, rear-entry full-body splash protective suit, providing liquid-tight protection.

- **Strengthened defenses:** AlphaTec® 66-330 Model 151-G09 reusable chemical protective suits offer rear-entry full-body splash protection
- **Improved comfort and safety:** By infusing anti-static properties within a strong, soft and flexible fabric, this hazmat suit affords comfort without compromising protection
- **Enhanced protection:** This greenish-yellow full-body protection suit provides good protection against alkalis, acids and infective agents
- **Certified performance:** In addition, this hazmat splash suit has been tested against EN 14605:2005, Type 3 (liquid-tight) standards



Industries

- Chemical
- Industrial
- Fire and Rescue


Applications

- Chemical Handling
- Fire & Rescue
- First Responders
- Emergency Teams
- Hazmat Teams
- Industrial and Tank Cleaning
- Petrochemicals

KEY FEATURES & BENEFITS

- **Rear-entry full-body splash protective suit:** Practical and reliable
- **Strong, flexible and anti-static:** Comfortable personal protection
- **Good chemical and biological barrier:** Robust, hazard protection suit

Material Diagram

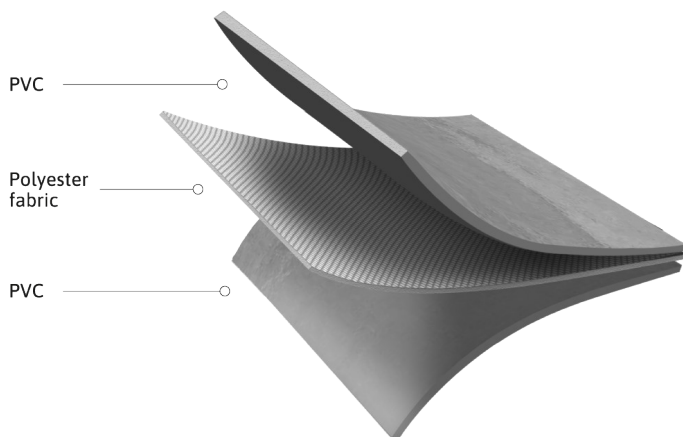

Seam Diagram



Performance Standards



Product Information

Product Information	
Available Sizes	2XS, XS, S, M, L, XL, 2XL, 3XL
Color	Orange
Country Of Origin	Lithuania
Models Available	151-G09, 156-G09
Packaging Overview	Individually Packed
Product Material	Strong and flexible polyester fabric, coated with PVC on both sides.
Product Reference	66-330 Model 151-G09
Standards Overview	<ul style="list-style-type: none">• EN 14605:2005 + A1:2009, type 3 (liquid-tight)• EN 14126:2003 (infective agent protection)• EN 1149-5:2008 (anti-static suit material)
Seam Type	Double welded
Shelf Life	7 years

Suit components & accessories

Suit Components and Accessories	
Design Features	<ul style="list-style-type: none"> • Anatomically designed face seal for optimum safety and comfort • Open double legs, i.e. inner leg with foot strap & outer splash guard • Watertight PVC zipper • Knees and elbows are reinforced to provide extra abrasion resistance • Bayonet glove ring system for quick and simple glove exchange
Visor And Face Seal	Anatomically designed rubber face seal.
Gloves And Attachments	AlphaTec® 08-354 gloves. The gloves are attached with a Bayonet glove ring system, which offers quick and simple glove exchange.
Footwear And Attachments	Open double legs, i.e. inner leg with foot strap & outer splash guard (Model 151). Boots are not included but available to order.
Zipper	Rear-entry watertight PVC zipper. The zipper is placed horizontally across the shoulders for ease of donning, and is protected by a splash guard/flap with hook-and-loop closure.
Ventilation	Fitted with an AlphaTec® Exhaust valve on the chest, to ventilate excess air inside the suit.
Included With Each Delivery	• 2 pcs extra locking pins for the Bayonet glove ring system • 1 pce Molycote lubrication for the O-rings in the Bayonet glove ring system • 1 pce grease stick for lubrication of the zipper

For additional information visit us at www.ansell.com, or call us at

Europe, Middle East & Africa Region
Ansell Healthcare Europe NV
T: +32 (0) 2 528 74 00

North America Region
Ansell Healthcare Products LLC
T: +1 800 800 0444

Australia
Ansell Limited
T: +61 1800 337 041

Asia Pacific Region
Ansell Global Trading Center
T: +603 8310 6688

Latin America & Caribbean Region
Ansell Commercial Mexico S.A. de C.V.
T: +52 442 248 1544 / 248 3133

Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending; www.ansell.com/patentmarking © 2024 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.

