
# **SYNSATION™ PF**

Vinyl, powder-free examination glove dual-marked for a wide range of applications (only available in EMEA)

# Vinyl, powder-free exam gloves dual-marked for a wide range of applications

- Cost-effective: These vinyl gloves are a cost-effective alternative to latex
- Medical-grade protection: These gloves are CE marked as both Class I medical device and Category III personal protective equipment so are suitable for both medical and industrial applications
- Easy donning: A coated inner surface provides a comfortable feel while making donning easier
- Beaded cuff: The beaded cuff design prevents roll down during work
- Reduced allergy risk: Vinyl material prevents Type I (latex) allergic reactions

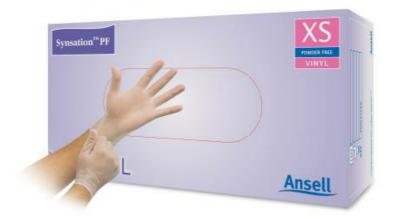

#### **Industries**

Healthcare

#### **Recommended For**

- Brief, low-risk examination procedures
- Protection from Type I latex allergy in HCW's or patients



## **TECHNICAL DATA SHEET**

|                        | Product Information  |
|------------------------|--|
| External Glove Surface | Smooth   |
| Audit Standards        | ISO 13485, ISO 9001  |
| Product Certification  | Medical Device Regulation (EU) 2017/745 Class I, Personal Protective Equipment Regulation (EU) 2016/425 Category III risks |
| Packaging Overview     | 100 gloves per dispenser<br>10 dispensers per case<br>1000 gloves per case   |
| Storage Instructions   | Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition.                   |
| Country Of Origin      | China  |
| Antistatic             | Not Tested   |

## **PHYSICAL PROPERTIES**

|   | Typical Values |             | Testing Method    |
|---|----------------|-------------|-------------------|
| Length (mm/inches)                      | 240 / 9.5      |             | ASTM D3767,EN 420 |
| Freedom from Holes (Inspection level I) | 1.5 /          | 1.5 AQL     |                   |
| Palm Thickness (mm/mils)                | O.11           | 0.11 / 4.3  |                   |
| Finger Thickness (mm/mils)              | 0.10           | 0.10 / 3.9  |                   |
|   | BEFORE AGING   | AFTER AGING |                   |
| Ultimate Tensile Strength (MPa)         | ≥11            | ≥11         | ASTM D412 & D573  |
| Elongation at Break (%)                 | ≥300           | ≥300        | ASTM D412         |
| Force at break (N)                      | ≥3.6           | ≥3.6        |                   |

#### **Performance Standards and Regulatory Compliance**















## For additional information visit us at www.ansell.com, or call us at

Europe, Middle East & Africa Region Ansell Healthcare Europe NV T: +32 (0) 2 528 74 00 F: +32 (0) 2 528 74 01

Asia Pacific Region MY +603 8310 6688 apac.medical@ansell.com CN: +86 21 38275000 infochina@ansell.com JP: +813 5549 8151 info.medical.jp@ansell.com North America Region Ansell Healthcare Products LLC T: +1 800 800 0444 F: +1 800 800 0445

Latin America & Caribbean Region BR +55 (11) 3356-3100 latam.medical@ansell.com MX: +52 442 296 2050 latam.medical@ansell.com CO: +57 1 288 3247 latam.medical@ansell.com Australia Ansell Limited T: +61 1800 337 041 F: +61 1800 803 578

**Russia** Ansell PYC Ten. +7 495 258 13 16 **Technology** 



Ansell,  $^{\textcircled{8}}$  and  $^{\textcircled{1}}$  are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending: www.ansell.com/patentmarking  $^{\textcircled{2}}$  2024 Ansell Limited. All Rights Reserved.

