

5000 - Model 151-G02

Rear entry chemical protective coverall with rubber face seal, Type 3/4/5 protection

Previously known as: MICROCHEM® 5000 - Model 151-G02

Developed as a lightweight, Type 3 chemical protection solution for first responders and the emergency services..

- Specialized protection: The AlphaTec[®] 5000
 Ultrasonically Welded & Taped Model 151-G02 is a multi-layer rear-entry protective suit, resistant to chemicals, biological hazards and chemical warfare agents
- Improved visibility: Due to its bright orange in color, this chemical protective suit is highly noticeable, which enhances workplace safety, and is also usable as a HAZMAT suit
- Heightened defenses: Protection against liquid and particulate hazards is further enhanced by this protective suit's welded and taped seams
- Enhanced features: It features a neoprene rubber face seal that fits most full-face respirators, attached socks with boot overflaps, rear horizontal zip entry, as well as attached Ansell barrier gloves with oversleeves and finger loops
- Certified antistatic capabilities: This full body protection suit also satisfies EN 1149-5 antistatic standards

*CE Category III Type 3/4/5 protection





Industries

- Chemical
- Life Sciences
- Mining
- Fire and Rescue
- Oil and gas
- Automotive Aftermarket
- Emergency Medical Services
- Food Processing

Applications

- Contaminated Environments
- Chemical Handling
- Filling, blending and charging of raw materials
- Transferring liquids and solids
- Opening and draining pumps valves or lines
- Loading and unloading of proces equipment
- Raw material sample collection
- Concentration mixing and palletisation
- Hazmat response
- Assembly and disassembly of large pipes

KEY FEATURES & BENEFITS


- Permeation barrier: Resists harmful chemicals* and biohazards
- Highly visible orange color: For reduced workplace injuries
- Taped and welded seams: Robust particulate and liquid resistance

*>480-minute breakthrough time against 14 of the 15 chemicals listed in EN ISO 6529


Technology



Material Diagram

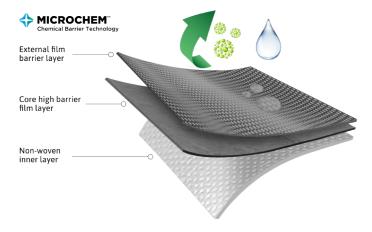

Seam Diagram

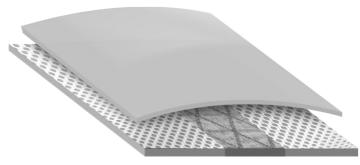

Performance Standards

















Product Information

| Product Information | |
|---------------------|--|
| Available Sizes | S, M, L, XL, 2XL, 3XL, 4XL, 5XL |
| Color | Orange |
| Country Of Origin | China |
| Packaging Overview | Individually Packed |
| Product Material | Multi-layer non-woven barrier Laminate fabric |
| Product Reference | 5000 - Model 151-G02 |
| Standards Overview | CE CATEGORY III (Type 3-B, Type 4-B, Type 5-B, EN 1073-2, EN 14126, EN 1149-5) |
| Seam Type | Welded and Taped |
| Shelf Life | 5 years |
| Style Number | O50T151B |



Suit components & accessories

| Suit Components and Accessories | |
|---------------------------------|---|
| Design Features | Neoprene rubber face seal, rear horizontal zip entry, ultrasonically welded and taped seams. Attached socks with boot overflap and attached Ansell AlphaTec [®] 02-100 Gloves with oversleeves and finger loops. |
| Gloves And Attachments | AlphaTec [®] 02-100 |

For additional in formation visit us at www.ansell.com, or call us at

Europe, Middle East & Africa Region Ansell Healthcare Europe NV T: +32 (0) 2 528 74 00

Asia Pacific Region Ansell Global Trading Center T: +603 8310 6688 North America Region Ansell Healthcare Products LLC T: +1 800 800 0444

Latin America & Caribbean Region Ansell Commercial Mexico S.A. de C.V. T: +52 442 248 1544 / 248 3133 Australia Ansell Limited T: +61 1800 337 041

Ansell, $^{\textcircled{8}}$ and $^{\textcircled{M}}$ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending: www.ansell.com/patentmarking $^{\textcircled{6}}$ 2024 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.

