

Ultra-low-linting breathable protective suit, made with microporous laminate for chemical protection.

- **Specialized protection:** The AlphaTec™ 2000 Ts PLUS Stitched & Taped - Model 134's protective barrier* resists liquid and particulate biological hazards and low-concentration liquid chemicals**
- **Heightened breathability:** Thanks to air- and water vapor-permeable microporous laminate fabric, this chemical-protective suit is more breathable, lowering the risk of heat stress
- **Enhanced fit and features:** Comfort is enhanced by its optimized fit, while internal overtaped stitching and serged and taped seams strengthen its protective barrier, for even greater personal protection
- **Reduced contamination risks:** This protective suit's ultra-low-linting fabric and tunneled, elasticated wrists and ankles reduce the risk of cross contamination in critical areas
- **Decreased surface defect risks:** Its silicone-free construction makes it suitable for spray-painting applications
- **Assured antistatic properties:** It also complies with EN 1149-5 antistatic standards

*this chemical protection suit ensures CE Category III Type 4/5/6 protection

**it withstands liquid chemical saturation and filters 100% of particulates down to 0.01 microns in size (EMSL test method)

Industries

- Life Sciences
- Automotive
- Food Processing


Applications

- Product inspection
- Loading and hauling
- Maintaining lab furniture and equipment
- Fibre Glass/Resin Applications/Ceramic Fibres
- Body painting including surface inspection
- Cleaning of plant and machines


KEY FEATURES & BENEFITS

- **Chemical barrier:** Low-risk liquid chemicals, liquid and particulate biohazards
- **Microporous laminate:** Greater breathability, lesser risk of heat stress
- **Optimized fit:** Enhanced wearer comfort and improved workplace safety

Material Diagram

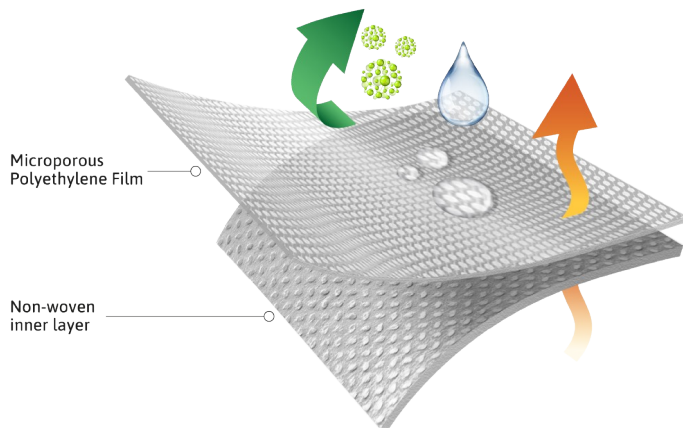

Seam Diagram

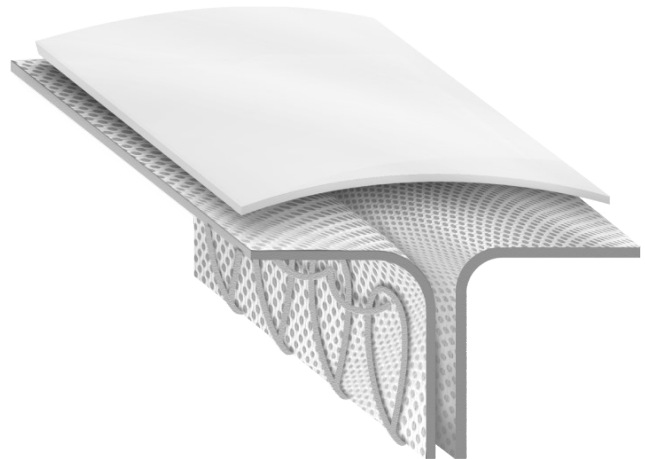

Performance Standards



AATCC76 ASTM F1671



EN ISO 13688:2013



Product Information

Product Information	
Available Sizes	XS, S, M, L, XL, 2XL, 3XL, 4XL, 5XL
Color	White
Packaging Overview	Individually Packed
Product Material	Microporous polyethylene Laminate non-woven
Product Reference	2000 Ts PLUS - Model 134
Standards Overview	CE CATEGORY III (Type 4-B, Type 5-B, Type 6-B, EN 1073-2, EN 14126, DIN 32781, EN 1149-5)
Seam Type	Stitched and Taped
Shelf Life	5 years

Suit components & accessories

Suit Components and Accessories

Design Features

Coverall, 3-piece hood, single zipper with re-sealable storm flap, and chin strap. Elasticated waist, elasticated wrists, hood and ankles.

For additional information visit us at www.ansell.com, or call us at

Europe, Middle East & Africa Region

Ansell Healthcare Europe NV
T: +32 (0) 2 528 74 00

North America Region

Ansell Healthcare Products LLC
T: +1 800 800 0444

Australia

Ansell Limited
T: +61 1800 337 041

Asia Pacific Region

Ansell Global Trading Center
T: +603 8310 6688

Latin America & Caribbean Region

Ansell Commercial Mexico S.A. de C.V.
T: +52 442 248 1544 / 248 3133

Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending; www.ansell.com/patentmarking © 2025 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.

