

**5000 - Model 151-G02** Rear entry chemical protective coverall with rubber face seal, Type 3/4/5 protection

#### Previously known as: MICROCHEM<sup>®</sup> 5000 - Model 151-G02

# Developed as a lightweight, Type 3 chemical protection solution for first responders and the emergency services..

- Specialized protection: The AlphaTec<sup>®</sup> 5000 Ultrasonically Welded & Taped - Model 151-G02 is a multi-layer rear-entry protective suit, resistant to chemicals, biological hazards and chemical warfare agents
- Improved visibility: Due to its bright orange in color, this chemical protective suit is highly noticeable, which enhances workplace safety, and is also usable as a HAZMAT suit
- Heightened defenses: Protection against liquid and particulate hazards is further enhanced by this protective suit's welded and taped seams
- Enhanced features: It features a neoprene rubber face seal that fits most full-face respirators, attached socks with boot overflaps, rear horizontal zip entry, as well as attached Ansell barrier gloves with oversleeves and finger loops
- Certified antistatic capabilities: This full body protection suit also satisfies EN 1149-5 antistatic standards

\*CE Category III Type 3/4/5 protection





#### Industries

- Chemical
- Life Sciences
- Mining
- Fire and Rescue
- Oil and gasAutomotive Aftermarket
- Emergency Medical Services
- Food Processing

## **KEY FEATURES & BENEFITS**

- **Permeation barrier:** Resists harmful chemicals\* and biohazards
- **Highly visible orange color:** For reduced workplace injuries
- **Taped and welded seams:** Robust particulate and liquid resistance


\*>480-minute breakthrough time against 14 of the 15 chemicals listed in EN ISO 6529

#### **Applications**


- Contaminated Environments
- Chemical Handling
- Filling, blending and charging of raw materials
- Transferring liquids and solids
- Opening and draining pumps valves or lines
- Loading and unloading of proces equipment
- Raw material sample collection
- Concentration mixing and palletisation
- Hazmat response
- Assembly and disassembly of large pipes

## Technology



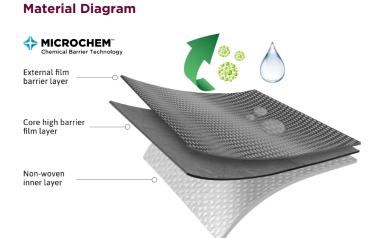

### Seam Diagram

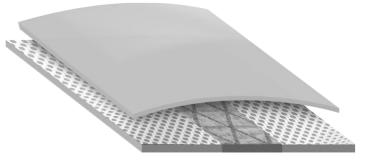



#### **Performance Standards**



#### **Product Information**

Product Information	
Available Sizes	S, M, L, XL, 2XL, 3XL, 4XL, 5XL
Color	Orange
Country Of Origin	China
Packaging Overview	Individually Packed
Product Material	Multi-layer non-woven barrier Laminate fabric
Product Reference	5000 - Model 151-G02
Standards Overview	CE CATEGORY III (Type 3-B, Type 4-B, Type 5-B, EN 1073-2, EN 14126, EN 1149-5)
Seam Type	Welded and Taped
Shelf Life	5 years
Style Number	O50T151B



#### Suit components & accessories

Suit Components and Accessories	
Design Features	Neoprene rubber face seal, rear horizontal zip entry, ultrasonically welded and taped seams. Attached socks with boot overflap and attached Ansell AlphaTec <sup>®</sup> 02-100 Gloves with oversleeves and finger loops.
Gloves And Attachments	AlphaTec <sup>®</sup> 02-100

#### For additional in formation visit us at www.ansell.com, or call us at

**Europe, Middle East & Africa Region** Ansell Healthcare Europe NV T: +32 (0) 2 528 74 00

Asia Pacific Region Ansell Global Trading Center T: +603 8310 6688 North America Region Ansell Healthcare Products LLC T: +1 800 800 0444 Latin America & Caribbean Region

Ansell Commercial Mexico S.A. de C.V. T: +52 442 248 1544 / 248 3133 Australia Ansell Limited T: +61 1800 337 041

Ansell, <sup>®</sup> and <sup>™</sup> are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending: www.ansell.com/patentmarking © 2024 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.

