


## Extra-thick disposable latex gloves, offering durable protection for heavy-duty applications

- **Extra defense:** MICROFLEX<sup>®</sup> 63-293 latex gloves are 3x thicker than standard disposable latex gloves, ensuring greater resistance against snags and tears
- **Comfortable fit:** These thick latex gloves' soft, elastic formulation delivers comfort and flexibility
- **Added protection:** With an extended cuff, these gloves offer workers enhanced forearm and wrist protection
- **Enhanced grip:** MICROFLEX<sup>®</sup> 63-293 gloves' textured fingertips enhance grip performance
- **Easy donning:** Donning is made easy thanks to the gloves' double-chlorinated design

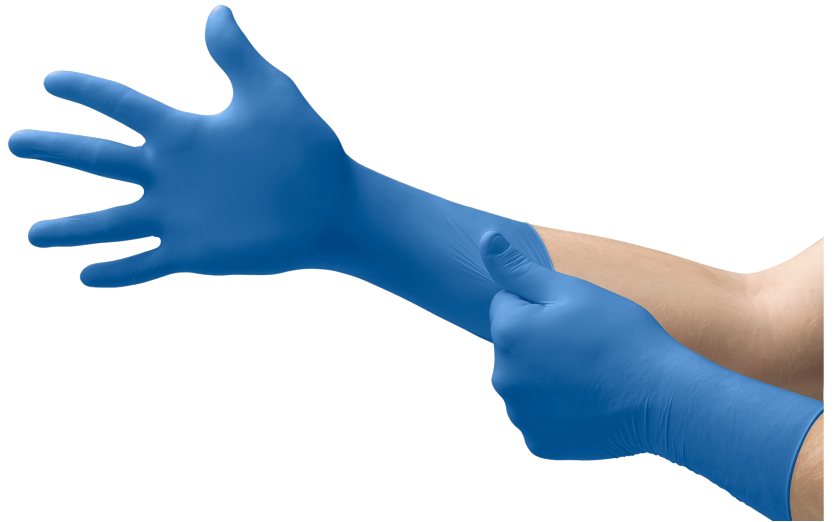

**\*CAUTION:** This product contains natural rubber latex, which may cause allergic reactions

### Industries

- Automotive
- Automotive Aftermarket
- Life Sciences
- Healthcare

### Recommended For

- Inspection, selecting, checking parts
- Assembly and inspection of components
- Picking and fastening components
- Equipment repair and maintenance
- General Purpose Auto Aftermarket
- Body panel repair and replacement
- Tire rotation & changes
- Animal care feeding and cleanup
- Maintaining lab furniture and equipment
- Sample taking and processing
- Raw material sample collection
- Extra protection over the wrist and arm

# TECHNICAL DATA SHEET

Product Information	
External Glove Surface	Textured Fingers
Audit Standards	EN ISO 13485:2012
Product Certification	EN ISO 374-1:2016 Type B KPT, EN 374:2003 Low Chemical Resistant, EN ISO 374-5:2016 Virus, EN 374:2003 Microorganism, Category III, EN 420:2003 + A1:2009, European Directive 89/686/EEC, EC 2023/2006, EU Food Contact Approved, EN 421:2010 Radioactive Contamination, EN ISO 21420:2020
Packaging Overview	50 gloves per dispenser 10 dispensers per case 500 gloves per case
Storage Instructions	Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition.
Country Of Origin	Malaysia
Product Segmentation	High Risk
Antistatic	Not Tested
Silicone Free	No

## PHYSICAL PROPERTIES

	Typical Values	Testing Method	
Length (mm/inches)	295 / 11.6	ASTM D3767, EN 420	
Freedom from Holes (Inspection level I)	1.5 AQL	ASTM D5151, EN 455-1	
Palm Thickness (mm/mils)	0.28/11	ASTM D3767, EN 420	
Finger Thickness (mm/mils)	0.36/14.2	ASTM D3767, EN 420	
	<b>BEFORE AGING</b>	<b>AFTER AGING</b>	
Ultimate Tensile Strength (MPa)	≥ 34	≥ 21	ASTM D412 & D573
Elongation at Break (%)	≥ 850	≥ 750	ASTM D412
Force at break (N)	≥ 15	≥ 10	EN 455-2

## ORDERING INFORMATION

Size	S (6.5 - 7)	M (7.5 - 8)	L (8.5 - 9)	XL (9.5 - 10)
Product Code	63293070	63293080	63293090	63293100

## Performance Standards and Regulatory Compliance



For additional information visit us at [www.ansell.com](http://www.ansell.com), or call us at

### Europe, Middle East & Africa Region

Ansell Healthcare Europe NV  
T: +32 (0) 2 528 74 00  
F: +32 (0) 2 528 74 01

### Asia Pacific Region

MY +603 8310 6688  
apac.medical@ansell.com  
CN: +86 21 38275000  
infochina@ansell.com  
JP: +813 5549 8151  
info.medical.jp@ansell.com

### North America Region

Ansell Healthcare Products LLC  
T: +1 800 800 0444  
F: +1 800 800 0445

### Latin America & Caribbean Region

BR +55 (11) 3356-3100  
latam.medical@ansell.com  
MX: +52 442 296 2050  
latam.medical@ansell.com  
CO: +57 1 288 3247  
latam.medical@ansell.com

### Australia

Ansell Limited  
T: +61 1800 337 041  
F: +61 1800 803 578

### Russia

Ansell PYC  
Ten. +7 495 258 13 16

Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending; [www.ansell.com/patentmarking](http://www.ansell.com/patentmarking) © 2025 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.

