

## 5000 - Model 151

Rear entry chemical protective coverall with rubber face seal, Type 3/4/5 protection

Previously known as: MICROCHEM® 5000 - Model 151

### Heavy-duty, high-visibility chemical-protective suit, resistant to chemicals and biological hazards.

- **Specialized protection:** The AlphaTec® 5000 Ultrasonically Welded & Taped - Model 151 is a multi-layer protective suit, ensuring heavy-duty defenses against chemicals\*, biological hazards and chemical warfare agents
- **Improved visibility:** Thanks to its bright orange color, this chemical-protective suit remains noticeable and enhances workplace safety - it is also usable as a HAZMAT suit by HAZMAT response teams
- **Heightened defenses:** Welded and taped seams ensure it provides an even more robust barrier against particulate and liquid hazards
- **Enhanced features:** This protective suit also features a neoprene rubber face seal, fitting most full-face respirators, as well as safety-boosting dual-zip systems, rear horizontal zip entry, finger loops, and attached socks with boot overflaps
- **Certified antistatic capabilities:** In addition, it meets EN 1149-5 antistatic standards

\*CE Category III Type 3/4/5 protection



## Industries

- Chemical
- Life Sciences
- Mining
- Fire and Rescue
- Oil and gas
- Automotive Aftermarket
- Emergency Medical Services
- Food Processing

## Applications

- Contaminated Environments
- Chemical Handling
- Filling, blending and charging of raw materials
- Transferring liquids and solids
- Opening and draining pumps valves or lines
- Loading and unloading of process equipment
- Raw material sample collection
- Concentration mixing and palletisation
- Hazmat response
- Assembly and disassembly of large pipes
- Unexpected leakages spills or other releases

## KEY FEATURES & BENEFITS


- **Permeation barrier:** Resists chemicals/biohazards/chemical warfare agents\*
- **Highly visible orange color:** For better worker and workplace safety
- **Taped and welded seams:** Robust against liquids and particulates

\*>480-minute breakthrough time against 14 of the 15 chemicals listed in EN ISO 6529


## Technology



## Material Diagram

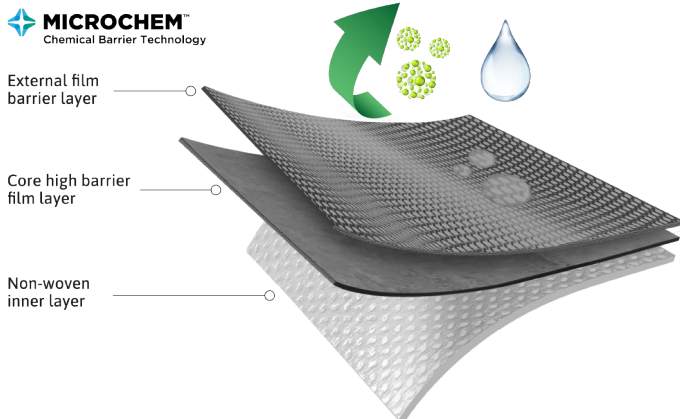

## Seam Diagram

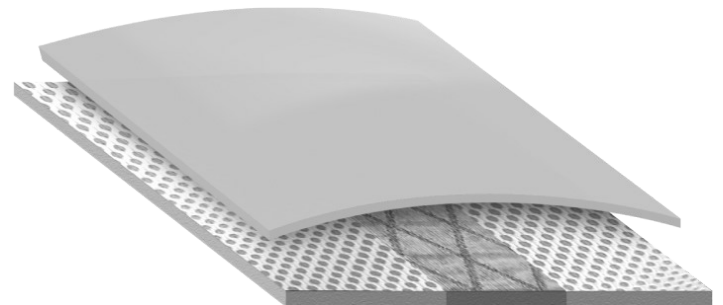

## Performance Standards



## Product Information

Product Information	
Available Sizes	S, M, L, XL, 2XL, 3XL, 4XL, 5XL
Color	Orange
Country Of Origin	China
Packaging Overview	Individually Packed
Product Material	Multi-layer non-woven barrier Laminate fabric
Product Reference	5000 - Model 151
Standards Overview	CE CATEGORY III (Type 3-B, Type 4-B, Type 5-B, EN 1073-2, EN 14126, EN 1149-5)
Seam Type	Welded and Taped
Shelf Life	5 years
Style Number	O50T151

## Suit components & accessories

### Suit Components and Accessories

#### Design Features

Neoprene rubber face seal, rear horizontal zip entry, ultrasonically welded and taped seams and attached socks with boot overflap.

**For additional information visit us at [www.ansell.com](http://www.ansell.com), or call us at**

**Europe, Middle East & Africa Region**

Ansell Healthcare Europe NV  
T: +32 (0) 2 528 74 00

**North America Region**

Ansell Healthcare Products LLC  
T: +1 800 800 0444

**Australia**

Ansell Limited  
T: +61 1800 337 041

**Asia Pacific Region**

Ansell Global Trading Center  
T: +603 8310 6688

**Latin America & Caribbean Region**

Ansell Commercial Mexico S.A. de C.V.  
T: +52 442 248 1544 / 248 3133

Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending; [www.ansell.com/patentmarking](http://www.ansell.com/patentmarking) © 2024 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.

