


## Extra long gloves offering reliable performance and chemical splash protection

- **Extended protection:** These long 355mm gloves provide extra forearm protection
- **Comfort and durability:** Strong, comfortable nitrile material resists tearing and protects in the event of chemical splashes
- **Easy donning:** An extra wash during manufacturing makes these gloves ultra-smooth for easier donning, doffing and double gloving
- **Reduced allergy risk:** Manufactured without accelerators, helping to protect users from Type IV skin allergies
- **Secure grip:** Fully textured design enhances grip in laboratory, food-processing and other applications
- **Smart packaging:** Packaged in polybags to minimize contamination risks

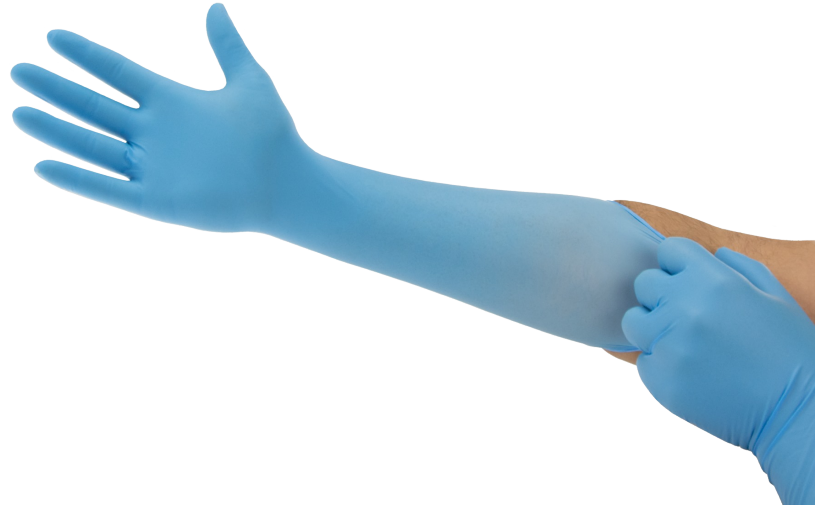

### Industries

- Electronics
- Food Processing
- Industrial
- Janitorial / Sanitation
- Life Sciences
- Manufacturing
- Recycling and Waste Disposal

### Recommended For

- Blending, compounding materials
- Food processing and handling
- Handling of tools
- Handling of paint/glue guns and sprayers
- Laboratory analysis
- Maintenance and equipment clean up
- Chemical Handling

# TECHNICAL DATA SHEET

Product Information	
External Glove Surface	Fully Textured
Audit Standards	ISO 13485, ISO 9001
Packaging Overview	50 gloves per polybag 10 polybags per case 500 gloves per case
Storage Instructions	Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition.
Country Of Origin	Malaysia
Product Segmentation	High Risk
Antistatic	Yes EN1149
Vulcanization Chemical Accelerators	<ul style="list-style-type: none"> <li>Made without accelerators</li> </ul> <p><i>Only a very small number of users may be sensitive to this ingredient(s) and hence may develop irritant and/or allergic contact reactions.</i></p>


## PHYSICAL PROPERTIES

	Typical Values		Testing Method
Length (mm/inches)	355 / 14		ASTM D3767, EN 420
Freedom from Holes (Inspection level I)	1.5 AQL		ASTM D5151, EN 455-1
Palm Thickness (mm/mils)	0.17 / 6.7		ASTM D3767, EN 420
Finger Thickness (mm/mils)	0.20 / 7.9		ASTM D3767, EN 420
	<b>BEFORE AGING</b>	<b>AFTER AGING</b>	
Ultimate Tensile Strength (MPa)	≥14	≥ 14	ASTM D412 & D573
Elongation at Break (%)	≥ 500	≥ 400	ASTM D412
Force at break (N)	≥ 6	≥ 6	EN 455-2

## ORDERING INFORMATION

Size	S (6.5 - 7)	M (7.5 - 8)	L (8.5 - 9)	XL (9.5 - 10)	XXL (10.5 - 11)
Product Code	93263070	93263080	93263090	93263100	93263110

## Performance Standards and Regulatory Compliance



For additional information visit us at [www.ansell.com](http://www.ansell.com), or call us at

### Europe, Middle East & Africa Region

Ansell Healthcare Europe NV  
T: +32 (0) 2 528 74 00  
F: +32 (0) 2 528 74 01

### Asia Pacific Region

MY +603 8310 6688  
apac.medical@ansell.com  
CN: +86 21 38275000  
infochina@ansell.com  
JP: +813 5549 8151  
info.medical.jp@ansell.com

### North America Region

Ansell Healthcare Products LLC  
T: +1 800 800 0444  
F: +1 800 800 0445

### Latin America & Caribbean Region

BR +55 (11) 3356-3100  
latam.medical@ansell.com  
MX: +52 442 296 2050  
latam.medical@ansell.com  
CO: +57 1 288 3247  
latam.medical@ansell.com

### Australia

Ansell Limited  
T: +61 1800 337 041  
F: +61 1800 803 578

### Russia

Ansell PYC  
Ten. +7 495 258 13 16

Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending; [www.ansell.com/patentmarking](http://www.ansell.com/patentmarking) © 2024 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.

