


Provides 33% longer, up-to-the-elbow personal protection in high-risk situations

- **Extended protection:** The MICROFLEX[®] 93-244 nitrile medical exam gloves provide 33% longer, up-to-the-elbow (395mm long) personal protection for high-risk situations
- **Reduced allergy risk:** Manufactured without accelerators, helping to protect users from Type IV skin allergies
- **Chemical & Chemo protection:** Applicable to a wide range of healthcare situations, these disposable gloves have been tested against commonly used chemicals in the Sterilization Department and chemotherapy drugs

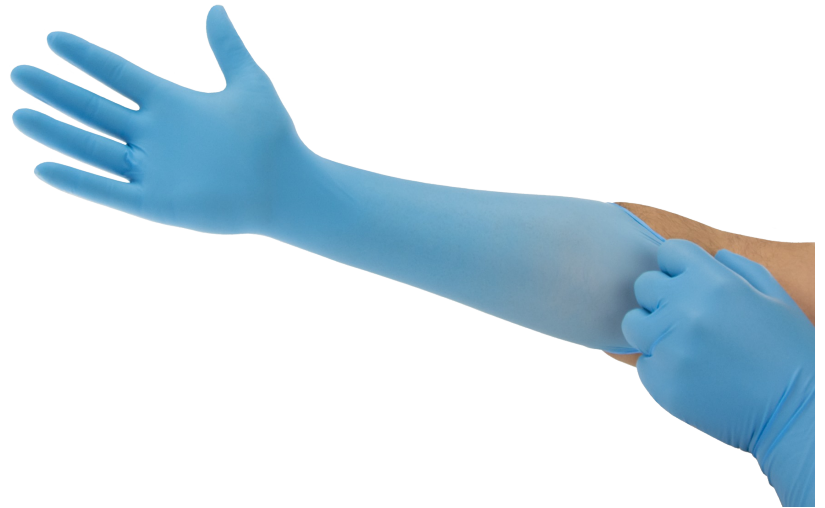

Industries

- Healthcare

Recommended For

- Central Supply
- Sterile Processing Department
- Biohazard response
- Laboratory analysis
- Preventing the risk of cross-contamination

TECHNICAL DATA SHEET

Product Information	
External Glove Surface	Fully Textured
Audit Standards	ISO 13485, ISO 9001
Product Certification	Medical Device Regulation (EU) 2017/745 Class I, Personal Protective Equipment Regulation (EU) 2016/425 Category III risks, CE 0493, EU Food Contact Approved, EC 2023/2006, EN 16523-1, EN ISO 374-1:2016 Type B KPT, EN ISO 374-5:2016 Virus, EN 455 1-4, EN ISO 21420:2020, FDA21 CFR 177-2600-US Food Contact Approved, ISO 13485, ISO 9001, UKCA, ASTM D6319
Packaging Overview	100 gloves per box 10 box per case 1000 gloves per case
Storage Instructions	Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition.
Country Of Origin	Malaysia
Product Segmentation	High Risk
Antistatic	Yes
Silicone Free	No
Vulcanization Chemical Accelerators	<ul style="list-style-type: none"> Made without accelerators <p><i>Only a very small number of users may be sensitive to this ingredient(s) and hence may develop irritant and/or allergic contact reactions.</i></p>

PHYSICAL PROPERTIES

	Typical Values		Testing Method
Length (mm/inches)	395 / 15.6		EN 455-2,ASTM D6319
Freedom from Holes (Inspection level I)	1.5 AQL		ASTM D5151,EN 455-1
Palm Thickness (mm/mils)	0.13 / 5.1		EN 455-2,ASTM D6319
Finger Thickness (mm/mils)	0.17 / 6.7		EN 455-2,ASTM D6319
	BEFORE AGING	AFTER AGING	
Ultimate Tensile Strength (MPa)	≥ 17	≥ 14	ASTM D412 & D573
Elongation at Break (%)	≥ 500	≥ 400	ASTM D412 & D573
Force at break (N)	≥ 6	≥ 6	EN 455-2

ORDERING INFORMATION

Size	XS (5.5 - 6)	S (6.5 - 7)	M (7.5 - 8)	L (8.5 - 9)	XL (9.5 - 10)	XXL (10.5 - 11)
Product Code	93244060	93244070	93244080	93244090	93244100	93244110

Performance Standards and Regulatory Compliance



For additional information visit us at www.ansell.com, or call us at

Europe, Middle East & Africa Region

Ansell Healthcare Europe NV
T: +32 (0) 2 528 74 00
F: +32 (0) 2 528 74 01

Asia Pacific Region

MY +603 8310 6688
apac.medical@ansell.com
CN: +86 21 38275000
infochina@ansell.com
JP: +813 5549 8151
info.medical.jp@ansell.com

North America Region

Ansell Healthcare Products LLC
T: +1 800 800 0444
F: +1 800 800 0445

Latin America & Caribbean Region

BR +55 (11) 3356-3100
latam.medical@ansell.com
MX: +52 442 296 2050
latam.medical@ansell.com
CO: +57 1 288 3247
latam.medical@ansell.com

Australia

Ansell Limited
T: +61 1800 337 041
F: +61 1800 803 578

Russia

Ansell PYC
Ten. +7 495 258 13 16

Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending; www.ansell.com/patentmarking © 2025 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.

